


DuraLine[®]
Plus

TRUSTED BY LEADING OEMS



**UNDERCARRIAGE AND WEAR PARTS
FOR CONSTRUCTION EQUIPMENT**

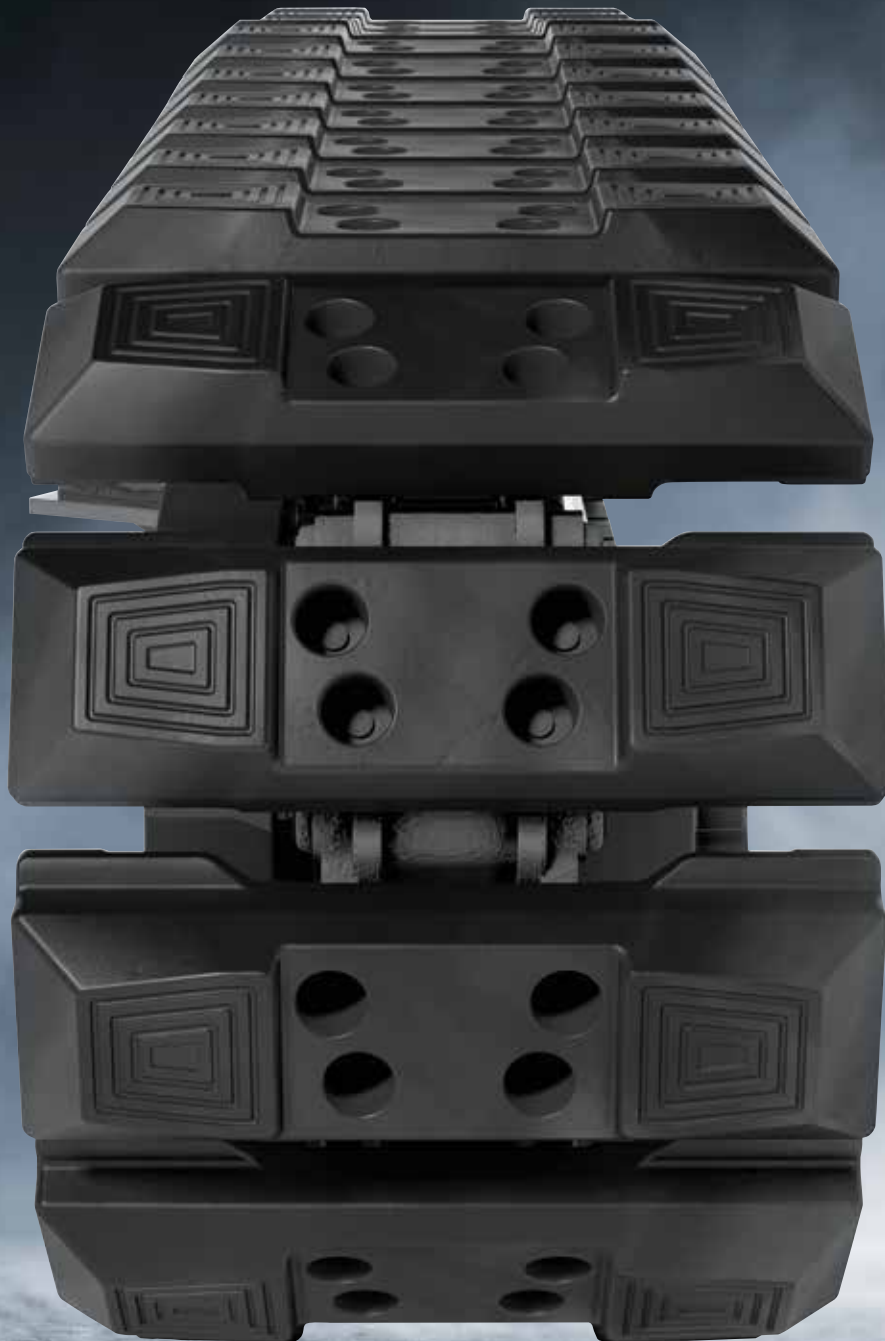




ROAD-LINER STYLE TRACK GROUP



ROAD-LINER STYLE

The DuraLine Plus Roadliner Pad is a chunky one-piece vulcanised pad which bolts directly on to the steel track chain.

Ideal for machines from 4T to 26T for a wide variety of applications including rail infrastructure work, individual pads can be replaced quickly and inexpensively as required.

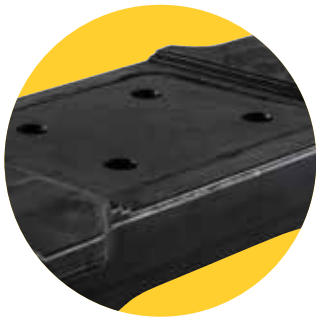

MACHINE WEIGHT	PRODUCT CODE	DIMENSIONS (mm)				LINK PITCH (mm)	BOLT TORQUE (Nm)
		A	B	C	D		
4T to 6T	DP400/135/R1	400	46	64	94	135	179
	DP400/135/R2	400	46	80	104	135	179
	DP400/135/R3	400	43.5	72	99	135	179
	DP400/135/R4	400	46	66	90	135	179
6T to 9T	DP450/140/R1	450	52	86	86	140	179
	DP450/154/R3	450	57	73	89	154	271
	DP450/154/R2	450	55	90	90	154	271
9T to 15T	DP500/171/R2	500	60	108	108	171	407
	DP600/171/R1	600	60	108	108	171	407
	DP500/175/R1	500	57	86	102	175	407
15T to 26T	DP600/190/R1	600	62	124	160	190	894
	DP600/190/R2	600	69	119	155	190	894

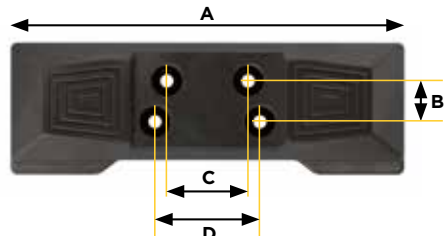



CLIP-ON STYLE

The DuraLine Plus Clip-on pad has been designed for ease of fitting and longer life. With a fixed bracket at one side and a secure clamp fitting on the other, this pad has been developed in response to a demand for a heavy-duty pad that can be used to quickly convert a steel tracked excavator to operate on roadways, concrete hard-standing and other finished surfaces without risk of damage.



MACHINE WEIGHT	PRODUCT CODE	DIMENSIONS (mm)		BOLT TORQUE (Nm)
		A	LINK PITCH	
9T to 15T	DP500/171/CL	500	171	215
	DP600/171/CL	600	171	215
	DP700/171/CL	700	171	215
15T to 26T	DP600/190/CL	600	190	215
	DP700/190/CL	700	190	215
	DP800/190/CL	800	190	215

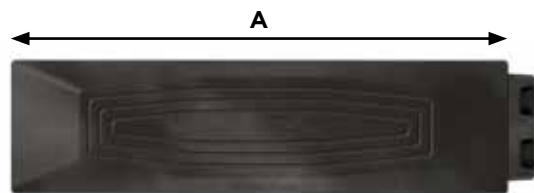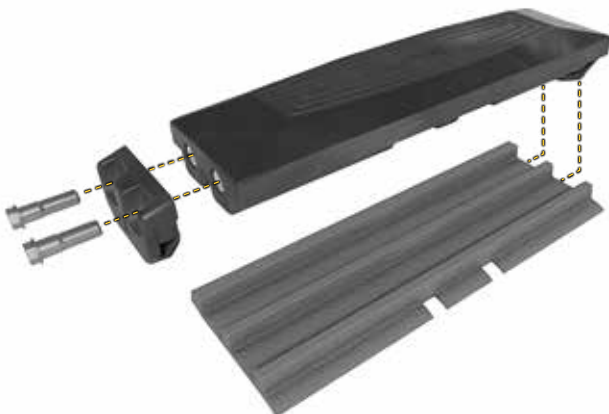


BOLT-ON STYLE

The DuraLine Plus Bolt-on pad offers an excellent solution for converting steel tracked machines to rubber pads for working on finished surfaces on a semipermanent basis.

This pad style is available in widths from 400mm to 600mm and is suitable for excavators from 4 to 26 tonnes.



MACHINE WEIGHT	PRODUCT CODE	DIMENSIONS (mm)			LINK PITCH	BOLT TORQUE (Nm)
		A	B	C		
4T to 6T	DP400/135/B1	400	300	46	135	85
6T to 9T	DP450/154/B2	450	350	58	154	140
9T to 15T	DP500/171/B1	500	400	58	171	215
	DP600/171/B1	600	500	58	171	215
15T to 26T	DP600/190/B1	600	400	69	190	435

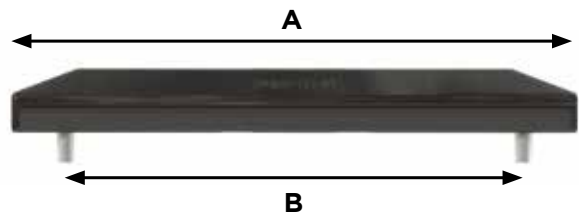



BOLT-ON STYLE TRACK GROUP



FOR THE BEST ON EARTH

Astrak UK Ltd

Wheatfield Road
Dunnikier Business Park
Kirkcaldy KY1 3PD

T. 0330 555 2000

E. uk@astrakgroup.com

www.astrakgroup.co.uk

ASTRAK Ireland

52 Chancellors Rd
Newry
BT35 8PX

T. + 44 (0) 28 3083 4888

E. ireland@astrakgroup.com

www.astrakgroup.ie



OFFICIAL
UK DEALER

